


• EUAB Series

1210 AuSn Sealing Crystal

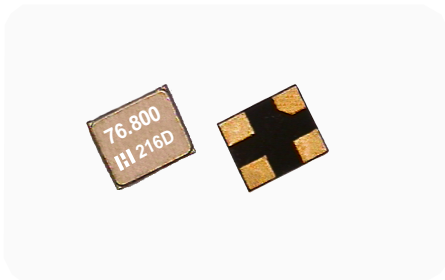

FEATURES


- Very compact and thin (1.2*1.0*0.30 mm)
- Frequency range of 26 to 96M with Fund
- Ideal for Wearable device and Short-range Wireless module
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder

Electrical Specifications


Item	Type	EUAB		
		26 to 27.999MHz	28 to 39.999MHz	40 to 96.000MHz
Frequency Range	F0	26 to 27.999MHz	28 to 39.999MHz	40 to 96.000MHz
Mode of Vibration		Fundamental		
Load Capacitance	CL	6 to 16pF		
Frequency Tolerance	$\Delta F/F_0$	$\pm 10\text{ppm}, \pm 30\text{ppm}, \pm 50\text{ppm}(\text{At } 25^\circ\text{C})$		
Equivalent Series Resistance	ESR	150 Ω max.	100 Ω max.	60 Ω max.
Temperature Stability	TC	$\pm 10\text{ppm}, \pm 15\text{ppm}, \pm 30\text{ppm}(\text{Refer to } 25^\circ\text{C})$		
Operating Temperature Range	T _{OPR}	-20~+70°C, -30~+85°C Option		
Storage Temperature Range	T _{STG}	-55~+125°C		
Shunt Capacitance	C0	2pF max.		
Insulator Resistance	IR	500M Ω min. (At 100V _{DC})		
Drive Level	DL	50 μ W (100 μ W max.)		
Aging	Fa	$\pm 2\text{ppm}$ max. (At 25°C, First year)		
Packing Unit		3000pcs/reel		

**Please contact us for inquiries regarding other Specifications

Mechanical Dimensions(mm)



Top View



Recommended Solder Pattern

